


STREETLIGHT PHOTOMETRIC TEST REPORT

Report number:

MANUFACTURER: Geniled			
Address:			
NAME: Optimus 3Mx1L 60W 4000K SH		TYPE:	WEIGHT:
SPECIFICATION:	CCT (K) : 4130	DIMENSION:	SERIAL No.:

MODEL:		Imax(cd) :	9134	Effective Flux(lm) :	10040.6
NOMINAL POWER(W) :	62	MAXIMUM(C, γ) :	0, 50.0	EEI	0.084
RATED VOLTAGE (V) :	220	EFFICIENCY(%) :	100.0	Voltage (V)	220.1
NOMINAL FLUX(lm) :	10040.6	η street_up(%) :	0.6	Current (A)	0.290
TEST FLUX(lm) :	10040.6	η street_down(%) :	57.7	Power (W)	61.88
LAMPS QUANTITY:	1	η house_up(%)	0.7	Power Factor	0.969
TOTAL RADIANT(mw) :	10040.6	η house_down(%) :	41.1	EEFFICIENCY(lm/W)	162.3

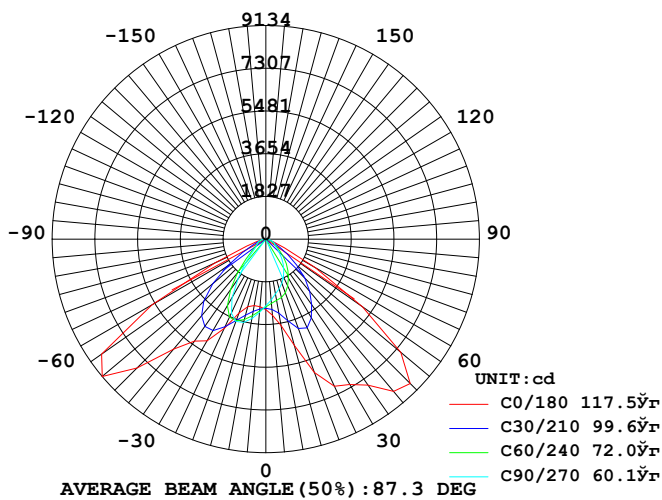


Test System:
 Temperature: 25.3 DEG
 Operators:
 Test Date: 05-22-2020

Test Set: 5.0 deg/s C-Gamma (TYPE C)
 Humidity: 65.0%
 Test Distance: 10.000 m
 Remarks:

AVERAGE AND CENTER E Figure

Report number:

MANUFACTURER: Geniled			
Address:			
NAME: Optimus 3Mx1L 60W 4000K SH		TYPE:	WEIGHT:
SPECIFICATION:	CCT (K) : 4130	DIMENSION:	SERIAL No.:

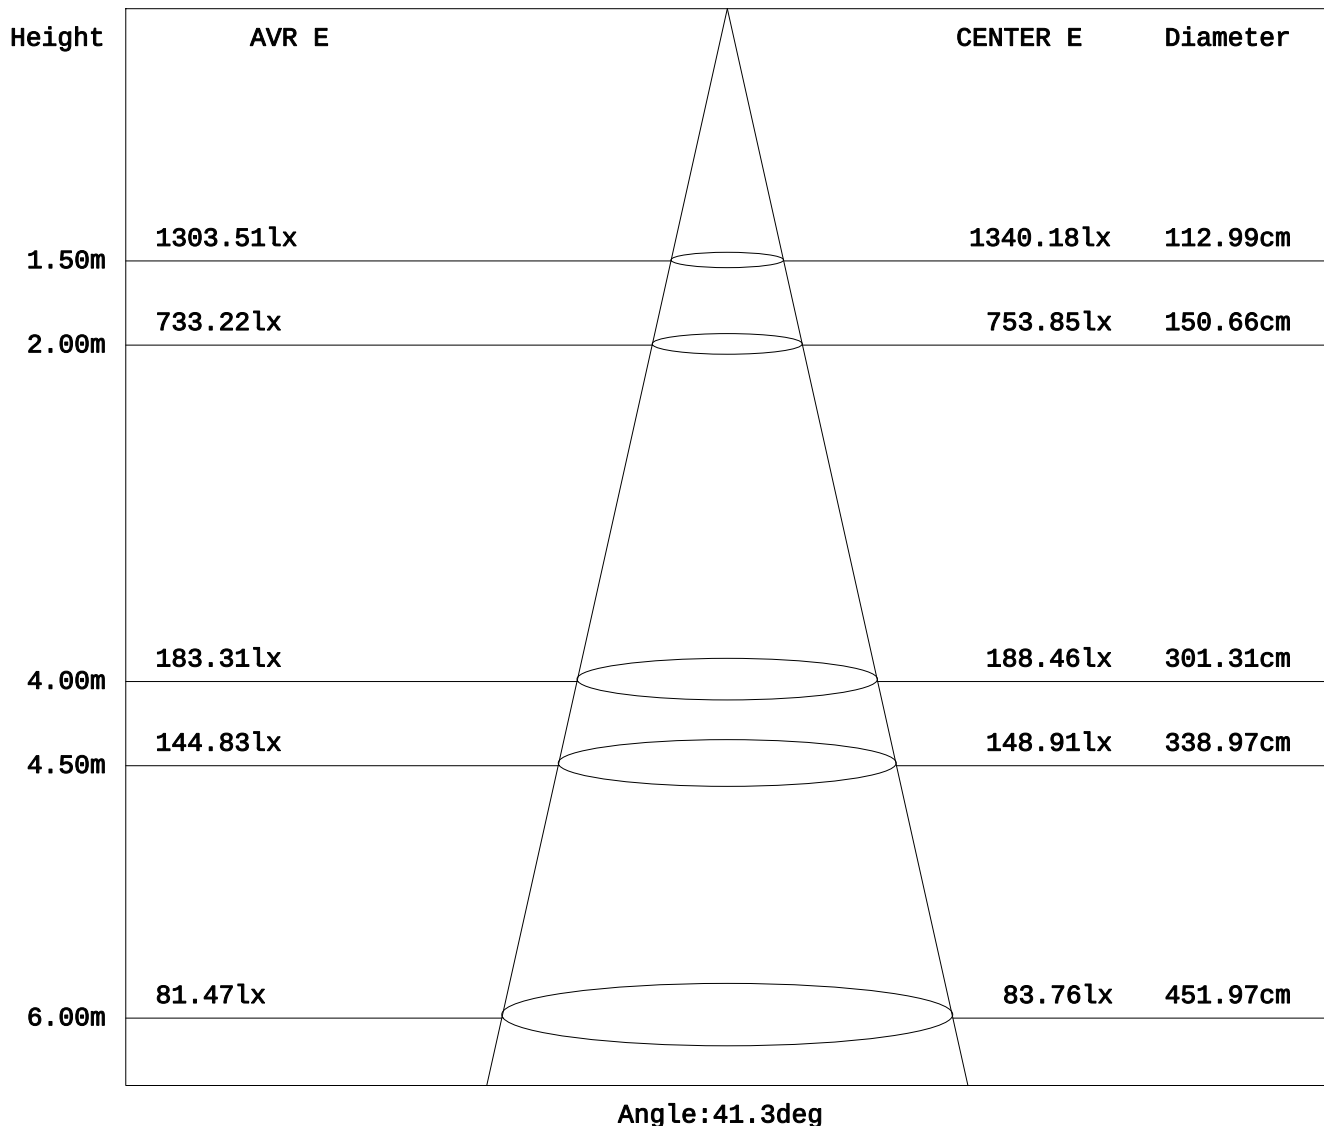

Test System:
 Temperature: 25.3DEG
 Operators:
 Test Date: 05-22-2020

Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity: 65.0%
 Test Distance: 10.000 m
 Remarks:

ZONAL FLUX DIAGRAM

Report number:

MANUFACTURER: Geniled			
Address:			
NAME: Optimus 3Mx1L 60W 4000K SH		TYPE:	WEIGHT:
SPECIFICATION:	CCT (K) : 4130	DIMENSION:	SERIAL No. :

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	zone	total
10.0	2889	3245	3448	3551	3742	2914	2382	2440	0- 10	284.0	284.0
20.0	3357	3716	3747	4394	6058	3086	2003	2249	10- 20	936.9	1221
30.0	5023	3813	2894	4444	7177	2658	1540	2039	20- 30	1697	2918
40.0	6140	2748	1411	3032	8501	1902	1051	1603	30- 40	2128	5046
50.0	9134	1197	612.7	1355	7535	1116	621.5	1023	40- 50	2213	7259
60.0	5631	476.1	426.8	506.8	2446	520.4	430.6	508.3	50- 60	1656	8915
70.0	872.7	244.3	338.8	272.7	355.2	255.8	303.8	256.2	60- 70	690.0	9605
80.0	169.3	108.7	196.6	108.7	86.50	101.1	133.2	102.1	70- 80	236.8	9842
90.0	34.59	14.10	33.00	13.50	9.700	16.69	5.600	17.20	80- 90	75.58	9917
100.0	17.00	5.800	10.59	5.900	15.20	12.90	5.400	12.40	90-100	13.39	9931
110.0	22.40	8.600	10.20	8.600	22.10	16.40	7.400	15.90	100-110	12.94	9944
120.0	28.40	13.50	11.30	13.00	26.00	21.69	11.50	21.50	110-120	15.96	9960
130.0	31.70	19.10	13.50	17.50	26.60	26.49	17.00	27.10	120-130	18.13	9978
140.0	32.50	23.90	16.79	22.00	28.79	30.40	22.90	30.59	130-140	18.57	9996
150.0	35.29	26.69	21.00	25.90	32.79	32.50	27.70	32.70	140-150	17.29	10014
160.0	38.00	29.49	26.00	29.30	34.40	33.79	31.90	34.40	150-160	14.22	10028
170.0	38.60	32.00	31.09	32.30	35.10	34.79	34.79	35.40	160-170	9.371	10037
180.0	37.29	34.40	34.90	34.59	37.00	34.79	34.59	35.20	170-180	3.292	10041
DEG	LUMINOUS INTENSITY:cd									UNIT: lm	

Test System:
Temperature:25.3DEG
Operators:
Test Date:05-22-2020


Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:10.000 m
Remarks:

ISOCANDELA DIAGRAM

Report number:

MANUFACTURER: Geniled			
Address:			
NAME: Optimus 3Mx1L 60W 4000K SH		TYPE:	WEIGHT:
SPECIFICATION:	CCT (K) : 4130	DIMENSION:	SERIAL No. :

UNIT: cd

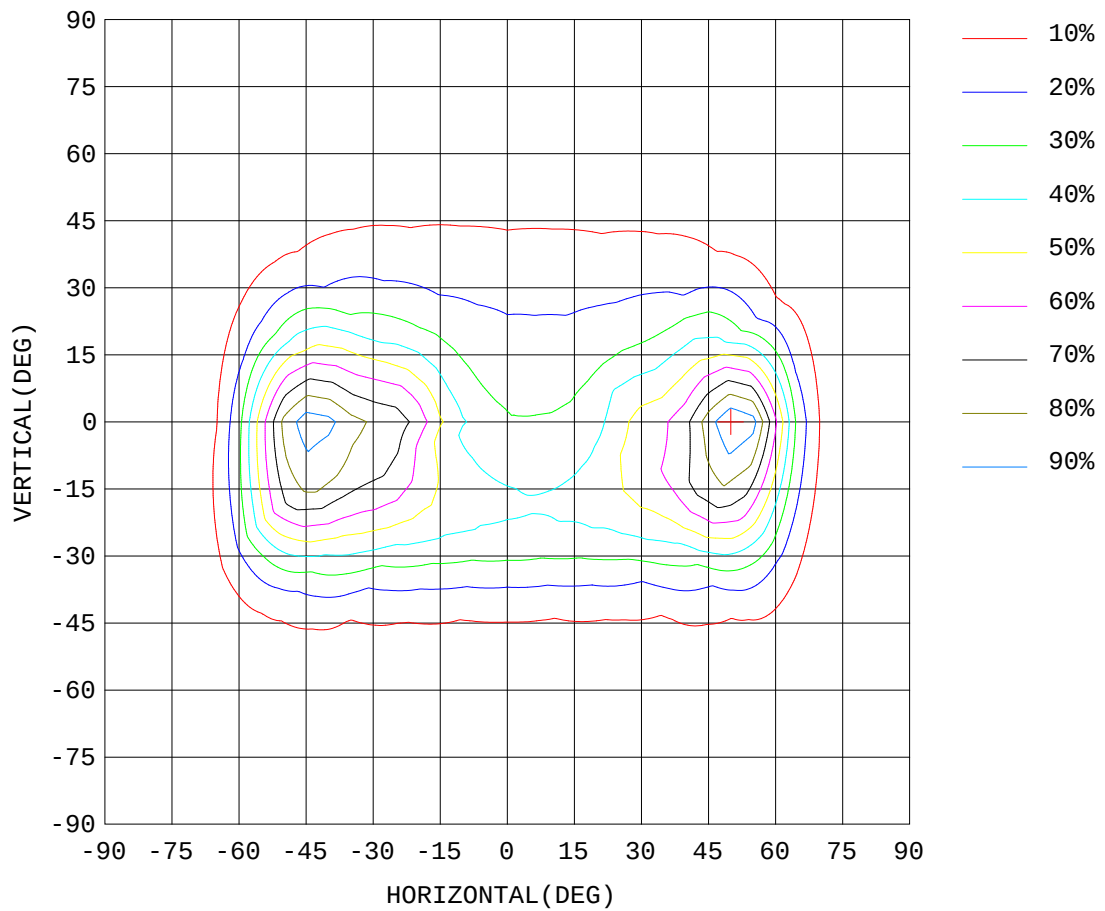

Test System:
 Temperature: 25.3 DEG
 Operators:
 Test Date: 05-22-2020



Test Set: 5.0 deg/s C-Gamma (TYPE C)
 Humidity: 65.0%
 Test Distance: 10.000 m
 Remarks:

ISOLUX DIAGRAM

Report number:

MANUFACTURER: Geniled			
Address:			
NAME: Optimus 3Mx1L 60W 4000K SH		TYPE:	WEIGHT:
SPECIFICATION:	CCT (K) : 4130	DIMENSION:	SERIAL No. :

ILLUMINANCE AT MH=10 m, Enadir = 30.15 lx

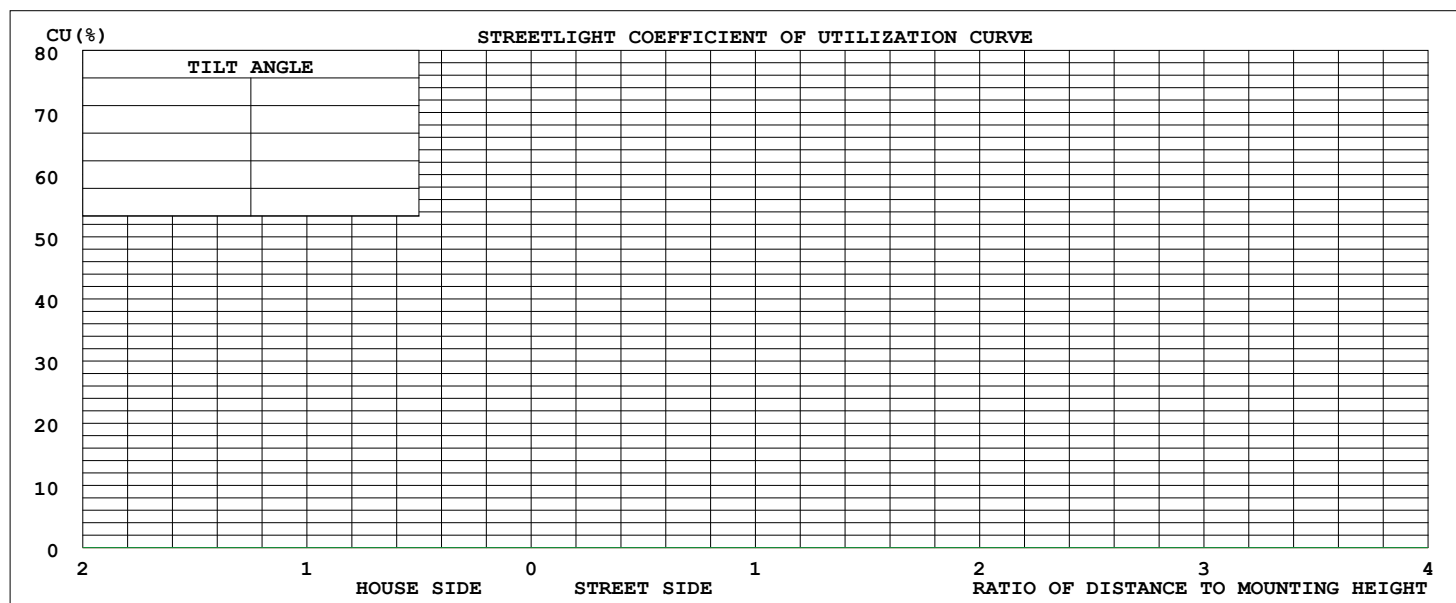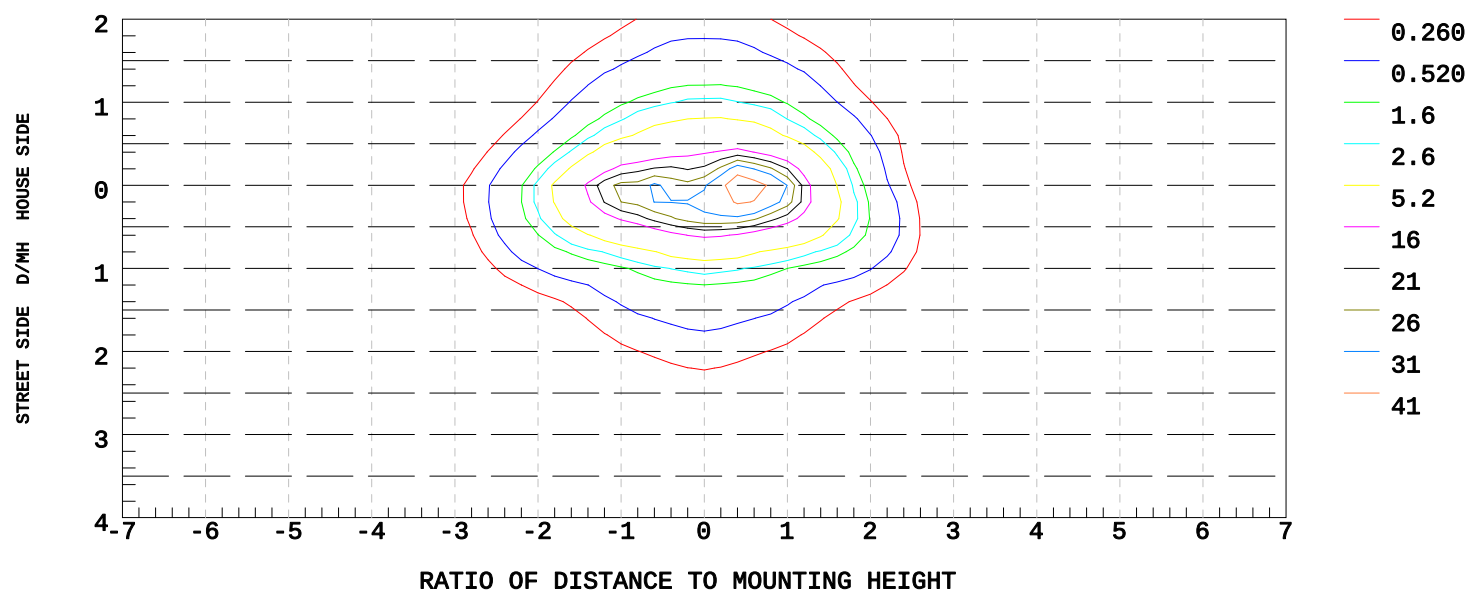


Test System:
Temperature:25.3DEG
Operators:
Test Date:05-22-2020

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:10.000 m
Remarks:

ISOCANDELA DIAGRAM

Report number:

MANUFACTURER: Geniled			
Address:			
NAME: Optimus 3Mx1L 60W 4000K SH		TYPE:	WEIGHT:
SPECIFICATION:	CCT (K) : 4130	DIMENSION:	SERIAL No.:

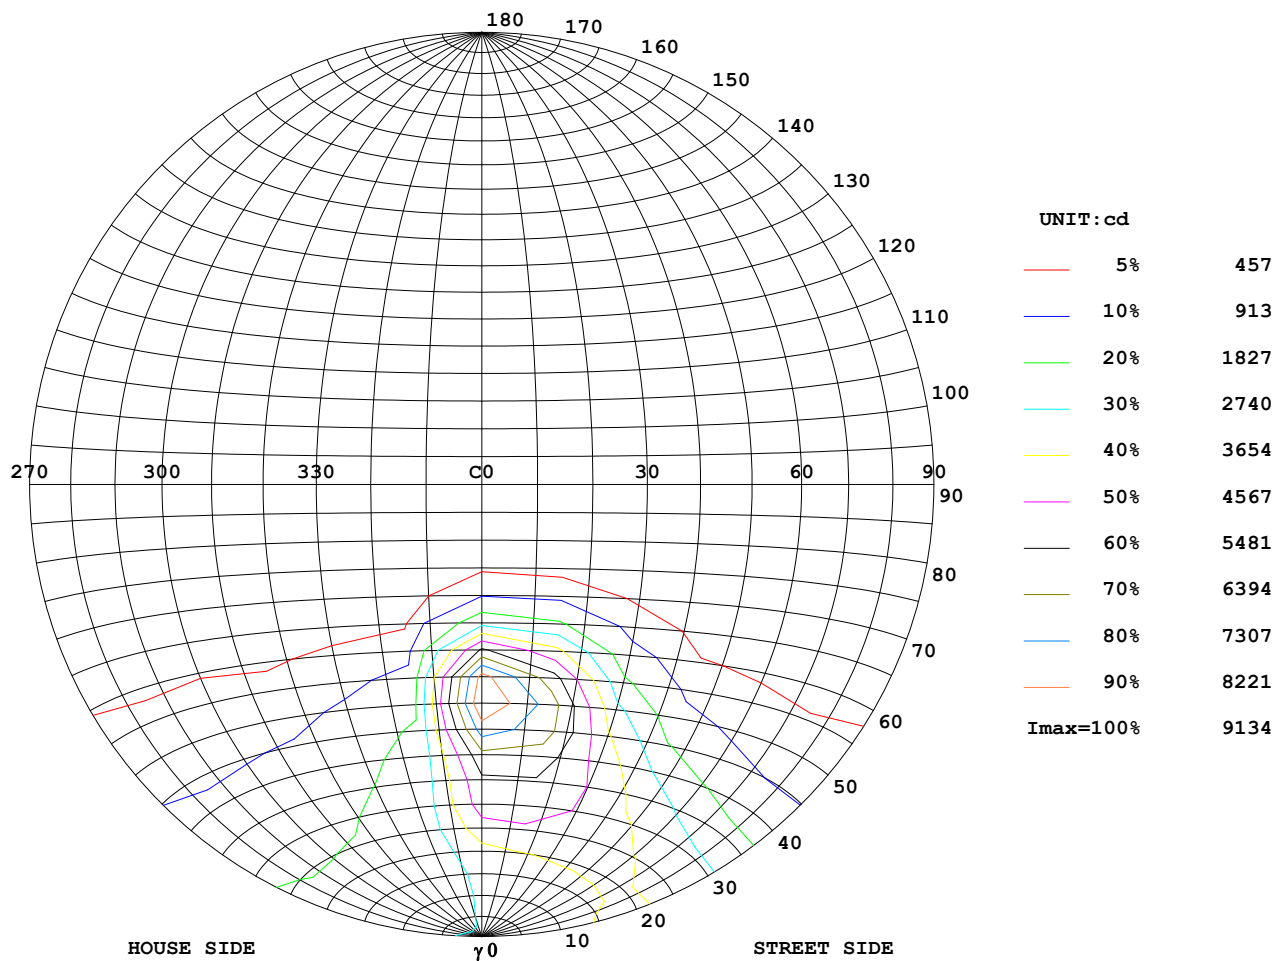

Test System:
 Temperature: 25.3 DEG
 Operators:
 Test Date: 05-22-2020

Test Set: 5.0 deg/s C-Gamma (TYPE C)
 Humidity: 65.0%
 Test Distance: 10.000 m
 Remarks:


LCS Report

Report number:

MANUFACTURER: Geniled			
Address:			
NAME: Optimus 3Mx1L 60W 4000K SH		TYPE:	WEIGHT:
SPECIFICATION:	CCT (K) : 4130	DIMENSION:	SERIAL No. :

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

Uplight

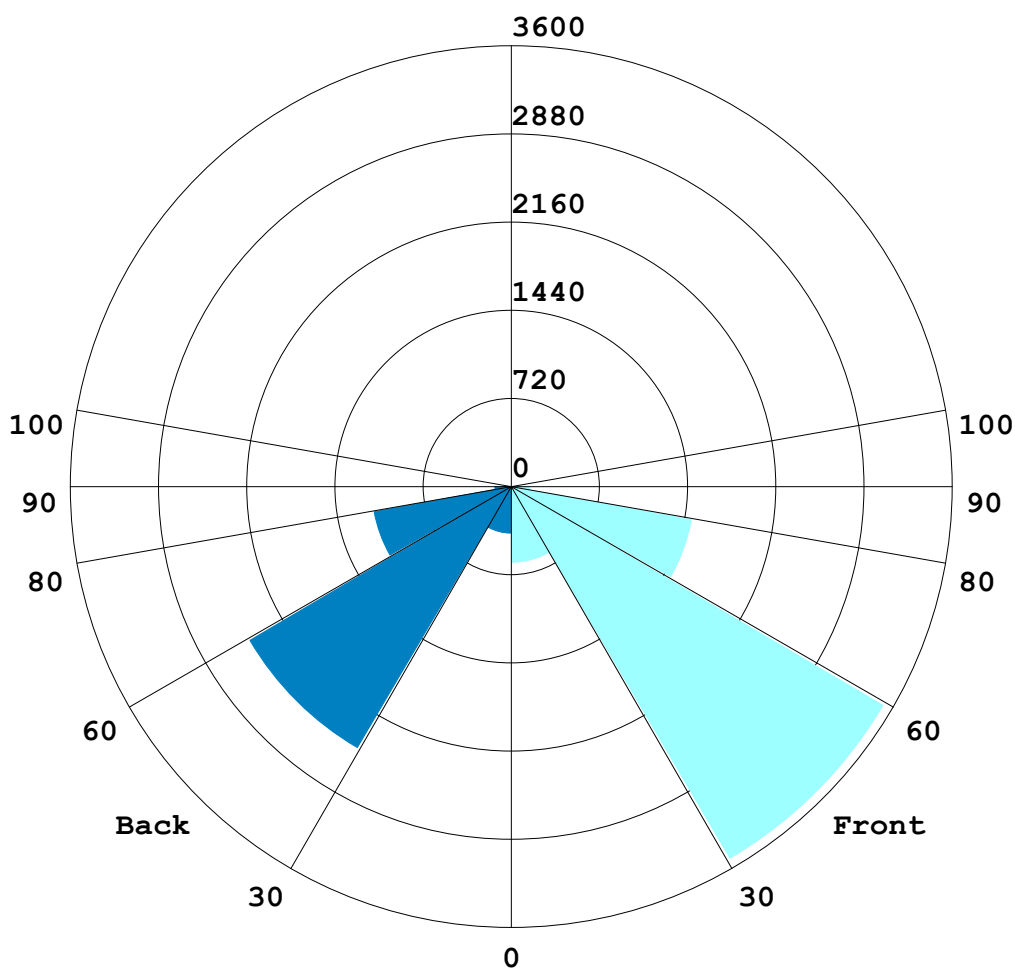


Test System:
 Temperature: 25.3 DEG
 Operators:
 Test Date: 05-22-2020

Test Set: 5.0 deg/s C-Gamma (TYPE C)
 Humidity: 65.0%
 Test Distance: 10.000 m
 Remarks:

ISOLUX DIAGRAM

Report number:

MANUFACTURER: Geniled			
Address:			
NAME: Optimus 3Mx1L 60W 4000K SH		TYPE:	WEIGHT:
SPECIFICATION:	CCT (K) : 4130	DIMENSION:	SERIAL No. :

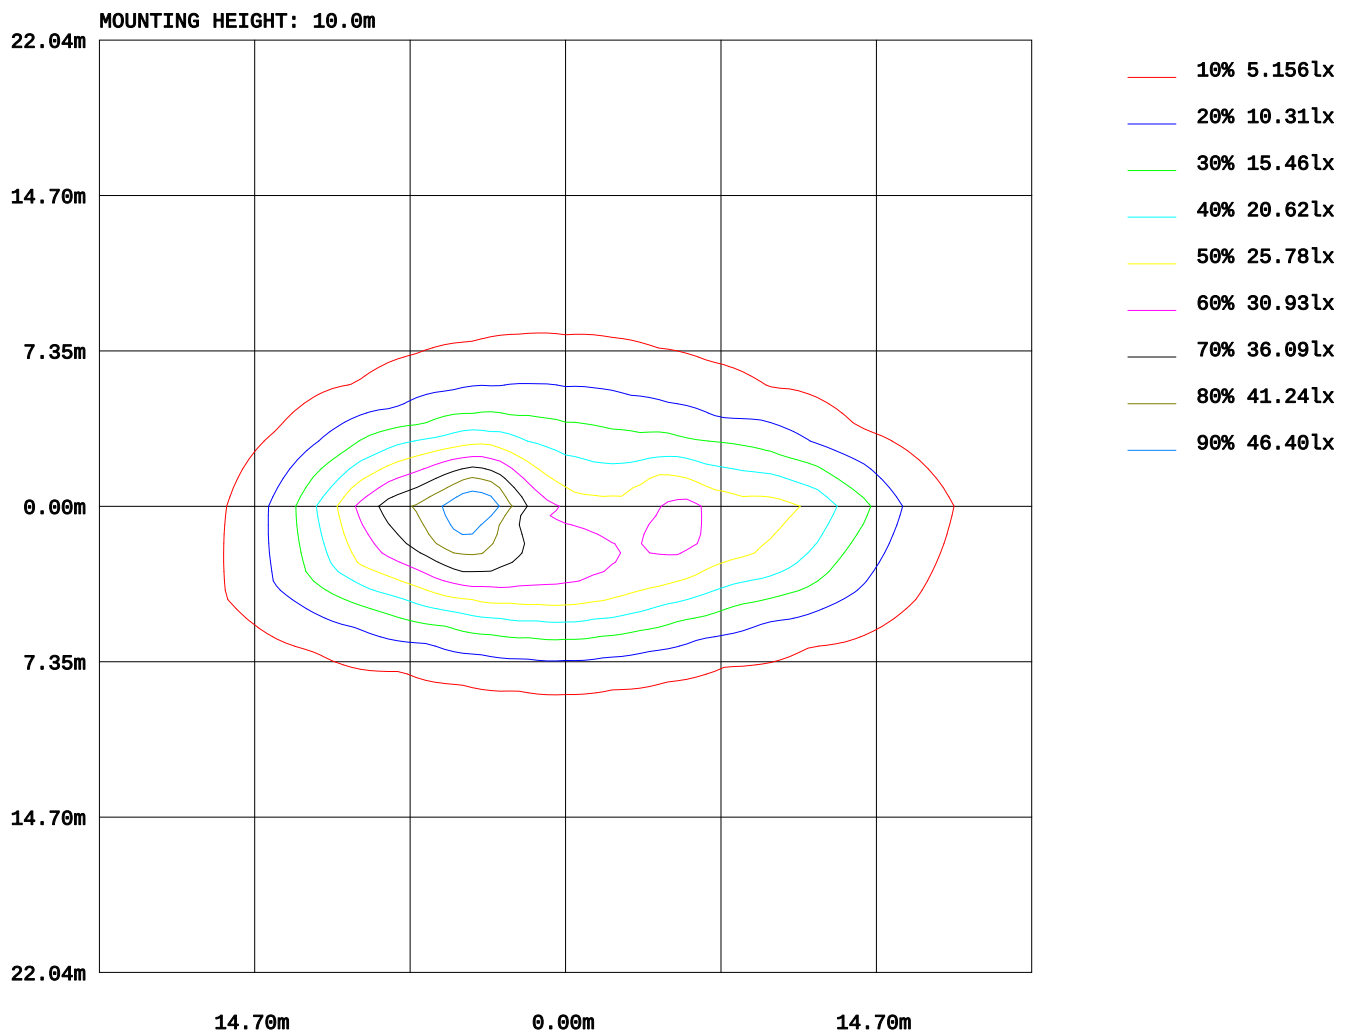


Test System:
 Temperature: 25.3DEG
 Operators:
 Test Date: 05-22-2020

Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity: 65.0%
 Test Distance: 10.000 m
 Remarks:

ISOCANDELA DIAGRAM

Report number:

MANUFACTURER: Geniled			
Address:			
NAME: Optimus 3Mx1L 60W 4000K SH		TYPE:	WEIGHT:
SPECIFICATION:	CCT (K) : 4130	DIMENSION:	SERIAL No.:

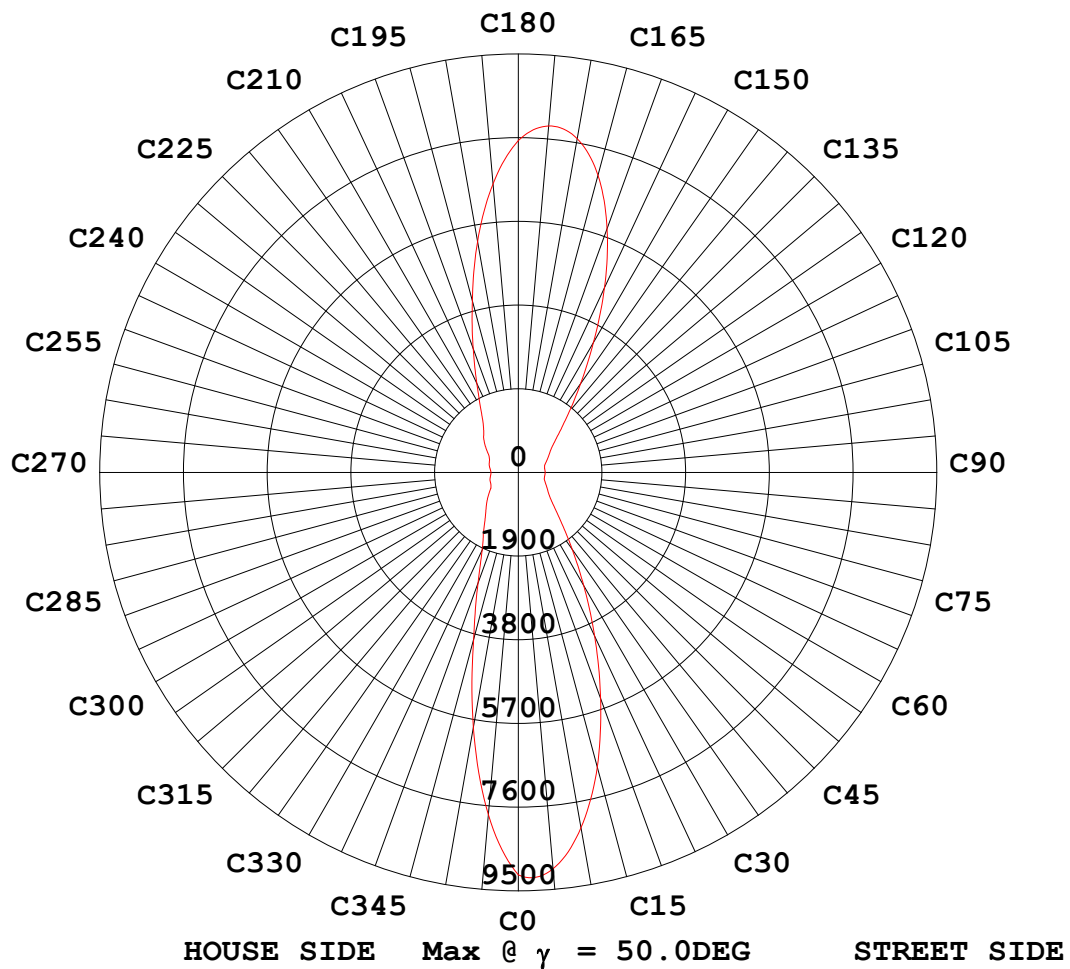

Test System:
 Temperature: 25.3DEG
 Operators:
 Test Date: 05-22-2020

Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity: 65.0%
 Test Distance: 10.000 m
 Remarks:

AREA LUMINOUS FLUX

Report number:

MANUFACTURER: Geniled																			
Address:																			
NAME: Optimus 3Mx1L 60W 4000K SH										TYPE:					WEIGHT:				
SPECIFICATION:					CCT (K) : 4130					DIMENSION:					SERIAL No.:				

VERTICAL (DEG)	AREA FLUX DIAGRAM																		UNIT: lm		Φ t	Φ a
	0.05	0.22	0.31	0.47	0.83	0.95	1.26	1.78	1.74	1.84	2.03	1.37	0.97	0.83	0.47	0.32	0.25	0.09	15.8	15.8		
90	0.06	0.35	0.72	1.31	2.37	3.34	4.39	5.68	6.61	6.85	6.27	4.61	3.37	2.39	1.30	0.75	0.42	0.13	50.9	50.9		
80	0.08	0.54	1.34	2.53	4.55	6.45	8.24	10.3	11.5	11.5	10.5	8.30	6.46	4.58	2.55	1.40	0.66	0.16	91.8	91.8		
70	0.09	0.76	2.09	4.16	7.59	11.0	13.2	15.3	15.9	15.8	15.0	12.8	10.7	7.64	4.29	2.11	0.94	0.19	140	140		
60	0.11	0.96	3.15	7.36	13.8	20.3	23.7	25.5	25.8	25.3	24.2	22.0	19.3	13.8	7.89	3.35	1.21	0.23	239	239		
50	0.12	1.14	4.79	14.7	27.7	38.6	42.4	41.9	40.7	39.6	38.3	37.0	34.3	27.2	16.3	5.69	1.61	0.26	413	413		
40	0.13	1.35	7.18	28.4	58.6	67.9	69.6	63.0	56.7	53.8	53.1	54.6	54.7	55.3	32.4	11.1	2.25	0.29	671	671		
30	0.14	1.53	10.6	50.9	104	117	113	92.9	72.3	65.6	67.3	77.7	86.1	94.3	69.8	21.3	2.97	0.31	1047	1047		
-30	0.14	1.63	14.1	77.5	155	168	164	126	89.1	77.8	82.5	105	119	142	118	33.0	3.61	0.33	1477	1477		
	0.14	1.70	16.3	88.6	173	185	178	132	102	95.2	98.0	121	137	159	130	35.8	3.76	0.33	1656	1656		
	0.14	1.72	16.1	82.2	153	162	157	132	115	109	110	122	131	144	104	28.5	3.37	0.32	1572	1572		
	0.14	1.59	13.4	63.0	106	115	115	110	105	102	100	99.0	98.7	100	71.0	19.9	2.78	0.30	1225	1225		
-40	0.13	1.35	8.97	32.8	54.1	61.9	63.2	64.9	64.9	63.9	61.2	57.3	54.2	49.5	36.8	12.0	2.13	0.27	690	690		
-50	0.11	1.11	4.95	13.9	22.6	24.3	26.7	27.8	28.6	28.3	26.7	24.7	21.9	20.7	15.0	6.37	1.59	0.24	296	296		
-60	0.10	0.88	3.01	6.72	9.72	10.9	12.9	13.9	14.9	14.9	13.9	12.6	10.5	9.30	6.91	3.61	1.14	0.20	147	147		
-70	0.08	0.64	1.96	3.83	5.20	6.93	8.65	9.74	11.0	11.1	9.90	8.65	6.65	4.96	3.88	2.17	0.80	0.17	96.3	96.3		
-80	0.06	0.42	1.21	2.11	2.69	3.96	5.14	6.05	7.16	7.25	6.26	5.17	3.91	2.69	2.14	1.29	0.51	0.13	58.2	58.2		
-90	0.05	0.24	0.61	0.93	1.05	1.86	2.38	2.40	3.08	3.17	2.61	2.42	1.83	1.06	0.95	0.65	0.29	0.09	25.7	25.7		
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)				20	30	40	50	60	70	80	90		
Φ t	1.85	18.1	111	482	902	1006	1009	881	772	734	729	777	801	840	623	190	30.3	4.04	10041			
Φ a	1.85	18.1	111	482	902	1006	1009	881	772	734	729	777	801	840	623	190	30.3	4.04		10041		

Test System:
 Temperature: 25.3 DEG
 Operators:
 Test Date: 05-22-2020

Test Set: 5.0 deg/s C-Gamma (TYPE C)
 Humidity: 65.0%
 Test Distance: 10.000 m
 Remarks:

UGR Table

Report number:

MANUFACTURER: Geniled				
Address:				
NAME: Optimus 3Mx1L 60W 4000K SH			TYPE:	WEIGHT:
SPECIFICATION:	CCT (K) : 4130	DIMENSION:		SERIAL No.:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	33.8	35.2	34.1	35.5	35.7	21.1	22.5	21.3	22.7	22.9
3H	33.9	35.2	34.2	35.5	35.7	22.0	23.3	22.3	23.6	23.8
4H	33.9	35.1	34.2	35.4	35.6	22.5	23.8	22.9	24.0	24.3
6H	33.8	34.9	34.1	35.2	35.5	23.2	24.4	23.6	24.6	24.9
8H	33.8	34.9	34.1	35.1	35.5	23.5	24.6	23.8	24.9	25.2
12H	33.7	34.8	34.1	35.1	35.4	23.7	24.8	24.1	25.1	25.4
4H 2H	33.5	34.7	33.9	35.0	35.3	22.2	23.5	22.6	23.7	24.0
3H	33.7	34.7	34.0	35.0	35.3	23.1	24.1	23.5	24.5	24.8
4H	33.6	34.6	34.0	34.9	35.3	23.7	24.6	24.0	24.9	25.3
6H	33.6	34.4	34.0	34.8	35.2	24.4	25.2	24.8	25.6	26.0
8H	33.5	34.3	34.0	34.7	35.1	24.7	25.5	25.1	25.9	26.3
12H	33.5	34.2	34.0	34.6	35.1	25.0	25.7	25.4	26.1	26.5
8H 4H	33.5	34.3	33.9	34.7	35.1	23.8	24.6	24.3	25.0	25.4
6H	33.5	34.1	33.9	34.5	35.0	24.7	25.4	25.2	25.8	26.2
8H	33.5	34.0	33.9	34.5	34.9	25.1	25.7	25.6	26.1	26.6
12H	33.4	33.9	33.9	34.4	34.9	25.5	26.0	26.0	26.4	27.0
12H 4H	33.5	34.2	33.9	34.6	35.0	23.8	24.6	24.3	25.0	25.4
6H	33.4	34.0	33.9	34.4	34.9	24.8	25.3	25.2	25.8	26.2
8H	33.4	33.9	33.9	34.4	34.9	25.2	25.7	25.7	26.2	26.7

Variations with the observer position at spacings:

S = 1.0H	+ 1.8 / - 1.3	+ 0.8 / - 0.8
1.5H	+ 4.6 / - 5.6	+ 1.2 / - 1.0
2.0H	+ 5.0 / - 9.3	+ 0.4 / - 0.3

CIE Pub.117 Corrected 10041 lm Total Lamp Luminous Flux.(8log(F/F0) = 8.0)

Test System:
Temperature:25.3DEG
Operators:
Test Date:05-22-2020

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:10.000 m
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Report number:

MANUFACTURER: Geniled			
Address:			
NAME: Optimus 3Mx1L 60W 4000K SH		TYPE:	WEIGHT:
SPECIFICATION:	CCT (K) : 4130	DIMENSION:	SERIAL No. :

UNIT: cd

C(DEG) γ (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210
0.0	3015	2986	2958	2931	2896	2881	2850	2849	2828	2842	2835	2860	3015	2986	2958
5.0	2902	2953	3002	3051	3090	3129	3147	3167	3160	3157	3120	3092	3265	3144	3016
10.0	2889	3022	3137	3245	3324	3398	3448	3499	3522	3551	3521	3485	3742	3512	3213
15.0	2996	3213	3366	3486	3562	3622	3685	3762	3861	3994	4092	4167	4690	4237	3610
20.0	3357	3611	3696	3716	3721	3703	3747	3839	4058	4394	4836	5227	6058	5257	4064
25.0	4208	4392	4134	3881	3677	3497	3496	3601	3978	4625	5517	6343	6945	5764	4187
30.0	5023	5101	4513	3813	3293	2936	2894	3013	3532	4444	5776	6908	7177	5651	3890
35.0	5328	5391	4553	3392	2626	2198	2099	2257	2812	3866	5549	7004	7619	5527	3415
40.0	6140	5981	4274	2748	1896	1449	1411	1492	2032	3032	5054	7319	8501	5553	2927
45.0	7797	6832	3759	1891	1207	906	893	928	1300	2130	4376	7605	8733	5152	2362
50.0	9134	6932	2974	1197	765	613	613	619	809	1355	3414	6989	7535	4033	1724
55.0	8571	5859	2001	732	536	473	491	470	551	810	2277	5468	5044	2548	1141
60.0	5631	3916	1179	476	419	398	427	392	423	507	1288	3319	2446	1339	674
65.0	2416	1943	653	346	345	346	379	339	346	360	673	1501	880	630	390
70.0	873	743	402	244	284	291	339	284	287	273	399	542	355	329	238
75.0	388	325	251	174	180	212	235	205	181	176	248	237	170	185	150
80.0	169	159	153	109	159	165	197	153	164	109	150	132	86.5	115	84.7
85.0	104	72.6	86.1	56.0	96.6	86.0	112	75.4	100	55.5	83.8	62.0	29.6	53.7	32.7
90.0	34.5	19.9	30.3	14.1	35.1	18.6	33.0	16.2	34.0	13.5	29.6	18.0	9.70	21.0	9.00
95.0	16.7	7.10	13.2	5.00	11.5	4.30	11.4	4.10	11.5	5.20	13.7	7.80	11.3	17.8	9.30
100.0	17.0	9.20	12.7	5.80	10.5	4.80	10.5	4.60	10.5	5.90	13.5	10.8	15.2	20.2	12.2
105.0	19.5	12.5	13.6	6.90	10.3	5.50	10.2	5.30	10.2	6.90	14.5	14.2	19.0	22.7	15.4
110.0	22.4	16.0	15.4	8.60	10.5	6.40	10.2	6.00	10.5	8.60	16.4	17.0	22.1	25.0	18.7
115.0	25.5	19.6	17.9	10.7	11.3	7.40	10.5	7.10	11.1	10.7	18.7	19.9	24.6	27.0	21.6
120.0	28.4	23.1	20.8	13.5	12.5	8.80	11.3	8.40	12.0	13.0	21.0	22.2	26.0	28.2	23.7
125.0	30.5	25.7	23.6	16.2	14.1	10.5	12.2	9.90	13.4	15.2	22.5	23.7	26.4	28.7	25.4
130.0	31.7	27.5	26.0	19.1	16.1	12.5	13.5	11.5	14.9	17.5	24.0	24.6	26.6	29.0	27.0
135.0	32.1	28.4	27.7	21.9	18.2	14.7	15.0	14.2	16.6	19.7	25.6	26.0	27.2	29.8	28.7
140.0	32.5	29.1	28.9	23.9	20.4	16.9	16.7	16.3	18.7	22.0	27.4	27.5	28.7	31.2	30.4
145.0	33.5	30.1	29.6	25.4	22.5	19.4	18.7	18.7	20.7	24.1	29.1	29.6	31.0	33.0	31.9
150.0	35.2	31.7	30.4	26.6	24.4	21.7	21.0	21.1	22.9	25.9	30.5	31.5	32.7	34.9	33.0
155.0	36.8	33.1	31.4	28.0	26.3	24.2	23.5	23.6	25.5	27.7	31.7	32.9	33.8	35.9	33.7
160.0	38.0	34.4	32.5	29.4	27.9	26.6	26.0	26.3	27.5	29.3	32.7	33.8	34.4	36.1	34.0
165.0	38.7	35.2	33.3	30.7	29.4	28.9	28.6	28.7	29.6	30.7	33.5	34.2	34.7	36.0	34.2
170.0	38.6	35.5	34.2	32.0	31.2	30.7	31.0	30.7	31.5	32.3	34.2	34.4	35.1	35.7	34.5
175.0	38.1	35.5	35.0	33.3	32.7	32.5	33.1	32.6	33.1	33.5	34.9	34.7	36.0	35.9	34.7
180.0	37.2	35.6	35.2	34.4	34.2	33.7	34.9	34.0	34.5	34.5	35.7	35.5	37.0	36.0	34.9

Test System:
Temperature:25.3DEG
Operators:
Test Date:05-22-2020

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:10.000 m
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Report number:

MANUFACTURER: Geniled			
Address:			
NAME: Optimus 3Mx1L 60W 4000K SH		TYPE:	WEIGHT:
SPECIFICATION:	CCT (K) : 4130	DIMENSION:	SERIAL No. :

UNIT: cd

C(DEG) γ (DEG)	225	240	255	270	285	300	315	330	345
0.0	2931	2896	2881	2850	2849	2828	2842	2835	2860
5.0	2882	2757	2673	2621	2579	2558	2604	2646	2731
10.0	2914	2661	2497	2382	2360	2361	2440	2542	2697
15.0	3013	2587	2342	2196	2183	2205	2331	2511	2787
20.0	3086	2442	2157	2003	2010	2067	2249	2586	3154
25.0	2975	2215	1926	1782	1808	1907	2172	2727	3717
30.0	2658	1938	1678	1540	1587	1704	2039	2722	3881
35.0	2275	1655	1418	1294	1351	1475	1844	2513	3868
40.0	1902	1367	1154	1051	1108	1236	1603	2271	4156
45.0	1520	1058	902	812	871	973	1334	1991	4398
50.0	1116	773	688	622	668	724	1023	1597	3920
55.0	769	566	542	501	533	541	731	1131	2757
60.0	520	428	442	431	441	419	508	687	1543
65.0	363	333	376	408	384	332	359	404	739
70.0	256	245	291	304	305	246	256	246	374
75.0	179	169	195	237	227	170	181	151	175
80.0	101	102	134	133	151	104	102	83.4	132
85.0	48.7	35.2	58.4	38.2	69.3	36.5	48.2	31.6	60.0
90.0	16.6	5.70	13.7	5.60	15.6	6.40	17.2	9.00	21.1
95.0	12.6	5.30	10.7	5.00	10.9	5.30	12.2	8.29	16.5
100.0	12.9	6.10	10.2	5.40	10.5	6.00	12.4	10.9	18.5
105.0	14.2	7.50	10.1	6.30	10.5	7.40	13.7	14.1	21.1
110.0	16.4	9.50	10.5	7.40	10.9	9.40	15.9	17.7	24.1
115.0	19.0	11.9	11.8	9.09	12.0	11.9	18.5	21.1	26.9
120.0	21.6	14.8	13.6	11.5	14.0	14.9	21.5	24.2	29.1
125.0	24.2	17.7	15.9	14.1	16.5	18.0	24.4	26.6	30.7
130.0	26.4	20.7	18.5	17.0	19.1	21.1	27.1	28.7	31.7
135.0	28.7	23.4	21.6	20.1	21.9	23.9	29.1	30.1	32.3
140.0	30.4	25.7	24.2	22.9	24.6	26.3	30.5	31.4	33.0
145.0	31.6	27.5	26.4	25.4	27.1	28.2	31.7	32.4	34.2
150.0	32.5	29.6	28.6	27.7	29.3	29.9	32.7	33.5	35.7
155.0	33.2	30.8	30.4	29.8	31.2	31.2	33.7	34.4	36.8
160.0	33.7	32.1	32.0	31.9	32.7	32.5	34.4	34.7	37.5
165.0	34.2	33.0	33.5	33.7	34.2	33.3	34.9	35.2	37.5
170.0	34.7	33.8	34.2	34.7	34.7	34.0	35.4	35.2	37.4
175.0	35.1	34.2	34.7	35.1	35.0	34.4	35.6	35.2	37.0
180.0	34.7	34.0	34.2	34.5	34.4	34.2	35.2	35.0	36.2

Test System:
Temperature:25.3DEG
Operators:
Test Date:05-22-2020

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:10.000 m
Remarks: